


-30kV DC POWER SUPPLY**«ABSTRACT»**

- ◆ This module is mounted on JIS standard (triple-width) or EIA standard 19inch rack.
- ◆ Its output voltage can vary a range of 0 – -33kV continuously by multi-dial on front panel.
- ◆ Its output voltage and current is displayed by 3 digit 7 segment LED.
- ◆ Output connector is on rear panel.
- ◆ Software is option.
- ◆ Specifications
 - ◇ Input voltage : AC100V \pm 10% 50/60Hz AC110V available by order
 - ◇ Output voltage : 0 ~ -30kV DC variable continuously
 - ◇ Output current : 0 ~ 100 μ A max
 - ◇ Voltage regulation : \pm 0.05% max. (AC100V \pm 10% and load variation 0 ~ 100%)
 - ◇ Ripple : 0.01% max.
 - ◇ Protection circuit : over current, over voltage, built-in spark protection
 - ◇ Temperature range : 0°C ~ 40°C humidity 10% ~ 90% (the environment without condensation, freeze, corrosive gas etc)

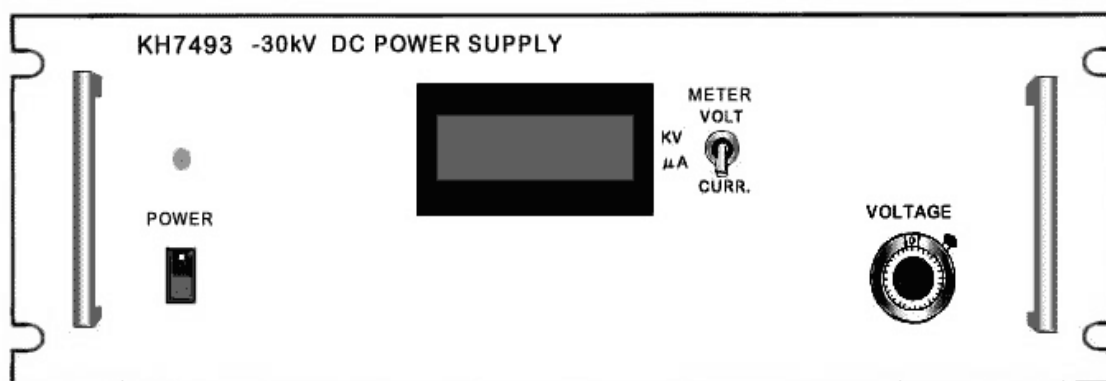

KAIZUWORKS CORPORATION
9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI
NISHITAMAGUN TOKYO 190-1222 JAPAN

Tel : 042-568-0866 Fax : 042-568-0867

E-mail kaizuwks@kaizuworks.co.jp Homepage <http://www.kaizuworks.co.jp>