


1-IN 22-OUT FANOUT



«ABSTRACT»

- ◆ This module outputs 22 signals for one input signal.
- ◆ The input and output signal is based on NIM standard of AEC.
(Atomic Energy Commission US)
- ◆ The maximum frequency is 170MHz, the minimum pulse width of input signal is about 2ns.
- ◆ The delay time between input and output is about 7ns.
- ◆ The input and output connector : Standard LEMO connector.
- ◆ Packaging : CAMAC standard single-width module.
- ◆ Consumption current : -6V Approx.780mA

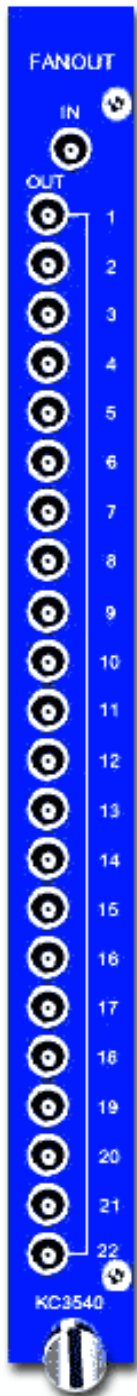

KAIZUWORKS CORPORATION
 9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI
 NISHITAMAGUN TOKYO 190-1222 JAPAN
 Tel : 042-568-0866 Fax : 042-568-0867

E-mail kaizuwks@kaizuworks.co.jp Homepage <http://www.kaizuworks.co.jp>