


## 16ch FIXED LOGIC DELAY (100nS)

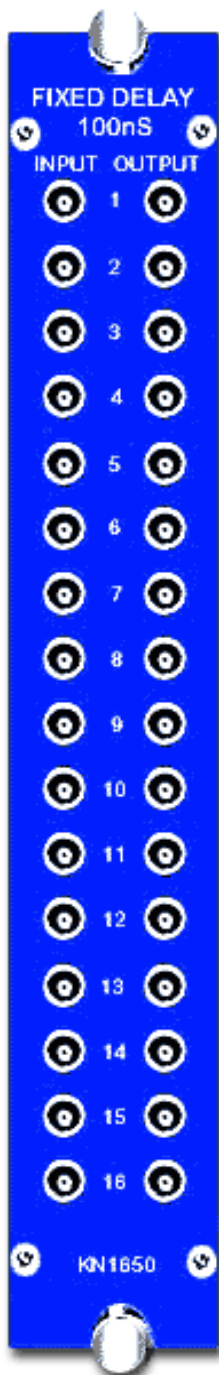

### 《ABSTRACT》

- ◆ This module has 16 channels time delay circuit made by the logic circuit.
- ◆ The input and output signal is based on NIM standard of AEC.  
(Atomic Energy Commission US)

### 《Specifications》

- ◇ Number of Input and output : 16
- ◇ Impedance : 50Ω
- ◇ Delay time : Approx.100nS
- ◇ Risetime,Falltime : Approx.1. 6nS
- ◇ Maximum frequency : 100MHz/10nS
- ◆ The input and output connector : Standard LEMO connector.
- ◆ Packaging : NIM standard single-width module.
- ◆ Consumption current -6V : Approx.1. 2A



**KAIZUWORKS CORPORATION**  
 9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI  
 NISHITAMAGUN TOKYO 190-1222 JAPAN  
 Tel : 042-568-0866 Fax : 042-568-0867

E-mail [kaizuwks@kaizuworks.co.jp](mailto:kaizuwks@kaizuworks.co.jp) Homepage <http://www.kaizuworks.co.jp>