


OCTAL FANOUT

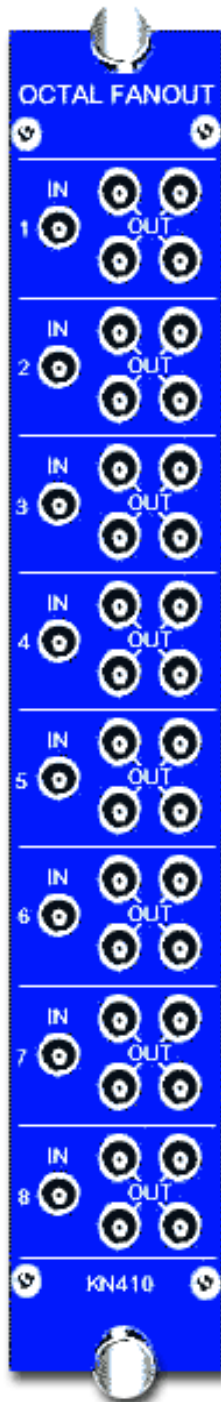

《ABSTRACT》

- ◆ This module has 8 channels that each channel has 1 input and 4 outputs in 1 channel.
- ◆ Input and output signal is based on NIM standard of AEC. (Atomic Energy Commission US)
- ◆ The circuit of this module is adopted the super high speed IC(ECL).

《Specifications》

Input characteristics ;

- ◇ Number of input : 1 × 8ch
- ◇ Impedance : 50 Ω
- ◇ NIM signal level

Output characteristics ;

- ◇ Number of output : 4 × 8ch
- ◇ Impedance : 50 Ω
- ◇ NIM signal level

- ◆ Maximum frequency : 110MHz
- ◆ Input and output connector : Standard LEMO connector
- ◆ Packaging : NIM standard single-width module.
- ◆ Consumption current : -6V Approx.1A



KAIZUWORKS CORPORATION
 9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI
 NISHITAMAGUN TOKYO 190-1222 JAPAN
 Tel : 042-568-0866 Fax : 042-568-0867

E-mail kaizuworks@kaizuworks.co.jp Homepage <http://www.kaizuworks.co.jp>