


FIXED LOGIC DELAY (20 · 50 · 100 · 200ns)

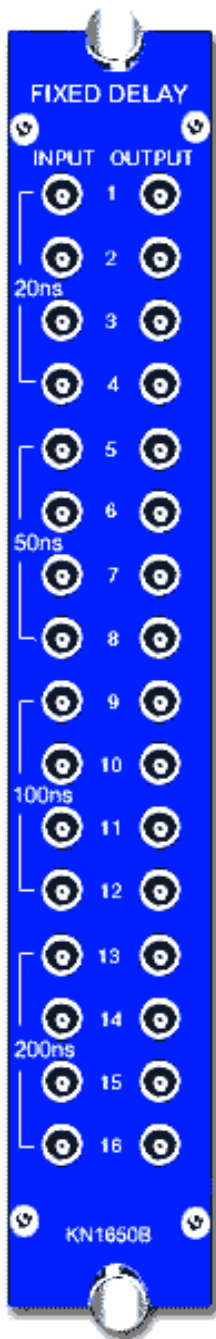

《ABSTRACT》

◆ This module has 4 channels that each of channel has time delay circuit of 20,50,100 and 200ns respectively, which made by logic circuit.

◆ The input and output signal is based on NIM standard of AEC. (Atomic Energy Commission US)

《Specifications》

◇ Input and output : each of 4 × 4 ch

◇ Impedance : 50 Ω

◇ Delay time : 20nS · 50nS · 100nS · 200nS ± 1%

◇ Risetime, Faltime : Approx. 1. 6nS

◇ Maximum frequency : 100MHz/10nS

◆ The input and output connector : Standard LEMO connector.

◆ Packaging : NIM standard single-width module.

◆ Consumption current - 6V : Approx. 1. 2A



KAIZUWORKS CORPORATION

9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI
NISHITAMAGUN TOKYO 190-1222 JAPAN

Tel : 042-568-0866 Fax : 042-568-0867

E-mail kaizuwks@kaizuworks.co.jp Homepage <http://www.kaizuworks.co.jp>