


## QUAD FANOUT

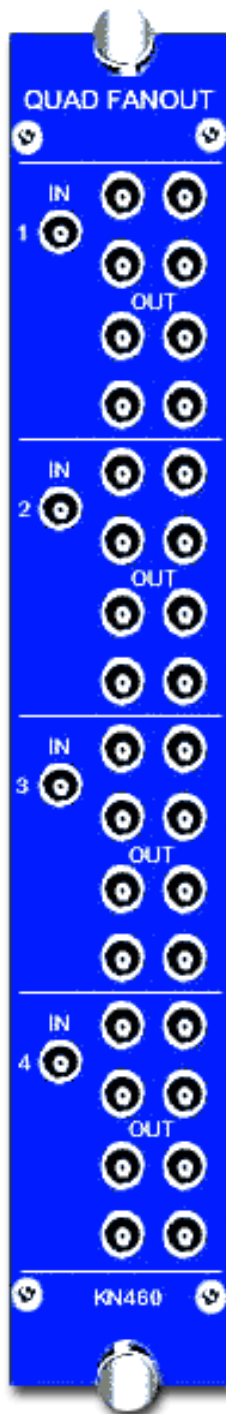

### 《ABSTRACT》

- ◆ This module has 4 channels that each channel has 1 input and 8 outputs in 1 channel.
- ◆ Input and output signal is based on NIM standard of AEC. (Atomic Energy Commission US)
- ◆ The circuit of this module is adopted the super high speed IC(ECL).

### 《Specifications》

#### Input characteristics ;

- ◇ 8 × 4ch
- ◇ Impedance : 50 Ω

#### Output characteristics ;

- ◇ 8 × 4ch
- ◇ Impedance : 50 Ω
- ◇ NIM signal level

- ◆ Maximum frequency : 110MHz
- ◆ Input and output connector : Standard LEMO connector
- ◆ Packaging : NIM standard single-width module.
- ◆ Consumption current : -6V Approx.1A



KAIZUWORKS CORPORATION  
 9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI  
 NISHITAMAGUN TOKYO 190-1222 JAPAN  
 Tel : 042-568-0866 Fax : 042-568-0867

E-mail [kaizuwks@kaizuworks.co.jp](mailto:kaizuwks@kaizuworks.co.jp) Homepage <http://www.kaizuworks.co.jp>