


## TTL QUAD FANOUT

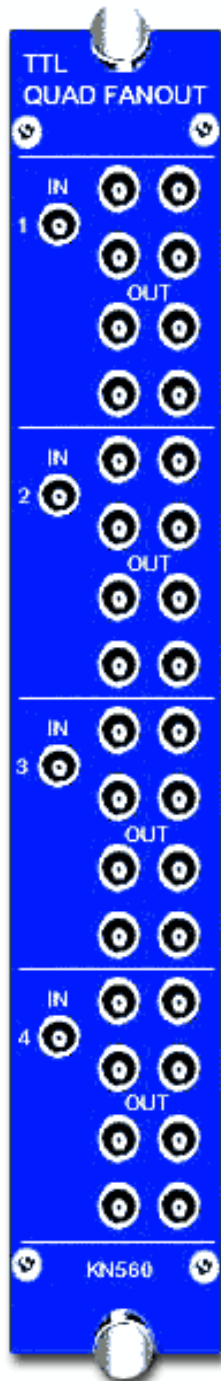

### 《ABSTRACT》

- ◆ This module has 4 channels that each channel has 1 input and 8 outputs in 1 channel. 8 output channels are the same output signal for the input signal.
- ◆ The input and output signal is based on NIM standard of AEC. (Atomic Energy Commission US)

### 《Specifications》

#### Input characteristics ;

- ◇ 1 × 4ch
- ◇ Impedance : 50 Ω

#### Output characteristics ;

- ◇ 8 × 4ch
- ◇ Impedance : 50 Ω
- ◇ Output level : +4V (open collector)
- ◇ Current drive mode at TTL input (APPROX. 80mA max)

- ◆ Maximum frequency : 20MHz
- ◆ The input and output connector : Standard LEMO connector.
- ◆ Packaging : NIM standard single-width module.
- ◆ Consumption current : +6V Approx. 350mA



KAIZUWORKS CORPORATION  
 9-18 HIGASHIMATSUBARA HAKONEGASAKI MIZUHOMACHI  
 NISHITAMAGUN TOKYO 190-1222 JAPAN  
 Tel : 042-568-0866 Fax : 042-568-0867

E-mail [kaizuwks@kaizuworks.co.jp](mailto:kaizuwks@kaizuworks.co.jp) Homepage <http://www.kaizuworks.co.jp>